



THEMIS

Science Coordinate Systems Definition

THM-SOC-110
September 29, 2006

Timothy Quinn, THEMIS Science Operations

Dr. John Bonnell, THEMIS EFI

Dr. Alain Roux, THEMIS SCM

Dr. Uli Auster, THEMIS FGM

Dr. Davin Larson, THEMIS SST

Dr. Krishan Khurana, THEMIS Science ACS

Michael Ludlam, THEMIS ISE

Peter Harvey, THEMIS Project Manager

Vassilis Angelopoulos, THEMIS Principal Investigator



Document Revision Record

Rev.	Date	Description of Change	Approved By
1	2006-09-22	Draft	-
2	2006-09-18		Signatories

Distribution List

Name	Email
Jim Lewis, U.C. Berkeley	jwl@ssl.berkeley.edu
Dr. Tai Phan, U.C. Berkeley	phan@ssl.berkeley.edu
Dr. Forrest Mozer, UCB	fmozer@ssl.berkeley.edu
Dr. Robert Ergun, LASP	ree@fast.colorado.edu
Dr. James McFadden	mcfadden@ssl.berkeley.edu
Dr. Chris Cully, LASP	cully@colorado.edu
Dr. Manfred Bester	Manfred@ssl.berkeley.edu
Dr. Ellen Taylor, U.C. Berkeley	ertaylor@ssl.berkeley.edu
Dr. Krishan Khurana, UCLA	kkhurana@igpp.ucla.edu
Dr. Dave Sibeck, NASA GSFC	david.g.sibeck@nasa.gov

TBD List

Identifier	Description
------------	-------------



Table of Contents



1. Introduction

1.1 Purpose and Scope.

The THEMIS coordinate systems are used in the transformation of sensor raw data into geophysical coordinates. Such transformations rely on ground measurements of Sun Sensor location relative to the magnetometers and also on ground or in orbit measurements of the Spin axis relative to the probe Geometry axis.

1.2 Applicable Documents.

- | | |
|---|---|
| 1. THM_SYS_012_PDMP | THEMIS Project Data Management Plan |
| 2. THM_SOC_101_TIME | THEMIS TIME Definition |
| 3. THM_SOC_108_GMAG_L1_VARNAAMES | THEMIS GMAG Variable Name Def's |
| 4. THM_SOC_111_SUNSENSPROC | THEMIS SUN SENSOR Science Processing |
| 5. THM_SOC_112_ATTPAIPROC | THEMIS Science ATT & Inertia Determ. |
| 6. THM_SOC_113_FGM_CALPROC | THEMIS FGM CAL File and Processing |
| 7. THM_SOC_114_SCM_CALPROC | THEMIS SCM CAL File and Processing |
| 8. THM_SOC_115_EFI_CALPROC | THEMIS EFI CAL File and Processing |
| 9. THM_SOC_116_ESA_CALPROC | THEMIS ESA CAL File and Processing |
| 10. THM_SOC_117_SST_CALPROC | THEMIS SST CAL File and Processing |
| 11. SAI-SPEC-1079A (Oct 26, 2005) | THEMIS Coordinate systems |
| 12. SAI-RPT-0722a (September, 2006) | Probe Alignment Report (MSSS data, p18) |
| 13. pturin e-mail on Faro alignment results (9/28/06) | FGM, SCM mag alignments |
| 14. THM-MB-MEC-005-Magnetometer clocking r7.pdf | MAG clocking angles |

Formatted: Bullets and Numbering


2. Probe-Centered Coordinate Systems

The probe-centered coordinate systems have their origin at the probe (rather than at Earth) and are named in accordance with the general rule ABC, where A \in {S, D} denotes spinning or despun coordinates; B \in {P, S, S} denotes the general direction of the X axis being along the ProbeX axis, the SunSensor X axis or the Sun, and finally C \in {G or L} denotes the Z axis direction being along the geometric Z axis or the probe L-vector.

2.1 SPG (Spinning Probe Geometric)

This system (Fig. 1) is defined by the mechanical designers of the probe in SAI-SPEC-1079A. Definition:

- 1) Origin location. The coordinate system is placed at the geometric center of the separation plane of the probe. The lowest reaching portion of the attachment ring, whose center is aligned with the Z-Axis, defines this plane.
- 2) Z-Axis. This axis is directed through the probe normal to the attachment plane.
- 3) X-Axis. This axis is aligned normal to the face sheet of Solar Panel 1. This face has an adjacent corner, moving counterclockwise, housing the ESA. In other words the ESA shall fall in the +X/+Y quadrant of the Probe coordinate system. **Note: This was chosen to provide an obvious indicator of the X/Y orientation when the probe is viewed from the top during integration operations.**
- 4) Y-Axis. This axis completes a right-handed orthogonal triad.

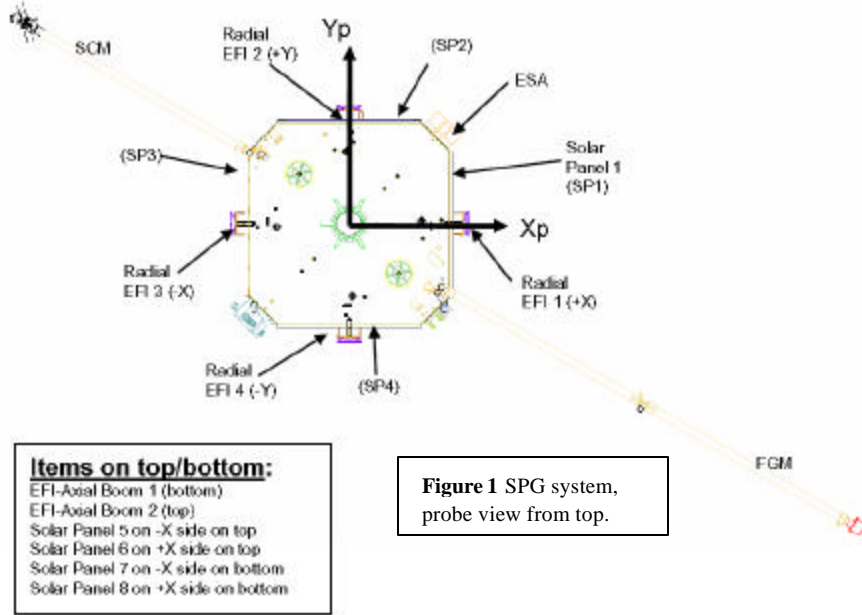

2.2 SSL (Spinning SunSensor – L-vectorZ)

This system points with Z along the Spin axis of the probe (the momentum vector is along the principal axis of inertia). The I_{zz} was measured during spin balance tests at JPL to be within 0.25deg of the geometric axis assuming (by modeling) magnetometer booms have been deployed but EFI booms are stowed. As fuel is consumed this angle is expected to change but not by much. Nevertheless we shall track it as function of time, after accurate determination (to within 0.1deg) by modeling magnetometer data through perigee. This angle is recorded in the daily STATE file.

The X axis of the system points towards the Sun Sensor (Miniature Spinning Sun Sensor) look direction. Theoretical angle between the Sun Sensor look direction and the probe X axis is 135 deg (must rotate Xgeometric axis to obtain Xsensor). A detailed figure of the sun sensor is shown in Figure 2, excerpt from SAIspec 1079a. The Zaxis of the sun sensor is aligned within <1deg to the Zgeometric axis of the probe, based on alignment measurements at JPL. The theoretical transformation matrix that takes a vector in the SPG system into one in the SSL system is thus given (based on ICDs) by:

MAG Booms Deployed

ICDs

8/26/2006

		G2S		
		a	b	g=- a+f
Euler Angles (deg)=		45.00	0.25	90.00
	Sin	0.71	0.00	1.00
Xgeom to X Sun Sensor f=	Cos	0.71	1.00	0.00

		G2S		
		PROBE GEOMETRIC TO SPIN AXIS		
Orthogonal Rotation Matrix		-0.71	0.71	0.00
Columns are Old Unit Vectors in New System		-0.71	-0.71	0.00
... Or Computed from Euler Angles		0.00	0.00	1.00



The actual rotation matrix based on measured alignments at JPL is given in the appendix.



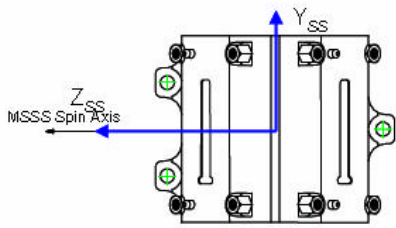


Figure 2 Detail of Sun Sensor coordinates

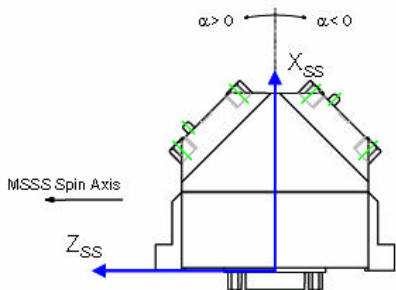

The orientation of the sun sensor relative to the magnetometers is seen in Figure 3 (THM-MB-MEC-005).

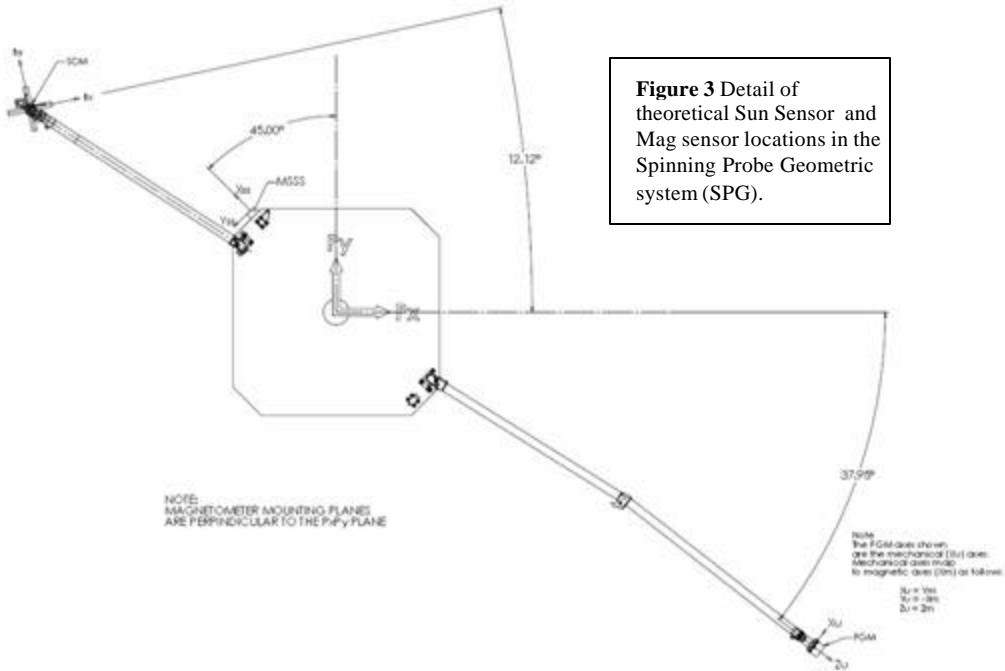


Figure 3 Detail of theoretical Sun Sensor and Mag sensor locations in the Spinning Probe Geometric system (SPG).



2.3 DSL (Despun Sun – L-vectorZ)

This is the system whose Z axis points towards the spin axis, the Y axis is normal to Z and the Spacecraft Sun direction viewed from the probe, and X completes the triad.

Operationally the despun system is obtainable by a rotation about the spin axis by an angle equal to Spin Phase in the direction *opposite* the spin direction. This rotation provides the DSL system at the time of the Spin Phase. This information is determined using the sun pulse signal by science operations, and written into the STATE file at 1min resolution for future use for coordinate transformation. Box car averaging is applied such that the noise level of the sun pulse is reduced, and the spin phase moves gradually from one point to the next, and interpolation between successive points to determine the spin phase is possible.


Since the plane defined by the Spin axis and the Spacecraft Sun direction ought to contain the intersection line of the nominal sun sensor field of view and the spin axis, the X-axis can be operationally defined as the intersection of the nominal sun sensor field of view at the time of the sun pulse, and the actual spin plane.

The theoretical and practical (measured) spin axis will be within $<0.25\text{deg}$ of each other. The measured sun sensor view plane is within $<1\text{deg}$ of the geometric axis. For spin axes near the ecliptic normal (as expected during the science operations phase) the sun pulse will occur when the sun sensor view direction is within a negligible angle ($<0.1\text{deg}$) from the DSL X axis.

In the arbitrary (or unfortunate) case when the spin axis ends up at a large angle to the geometric axis, the Sun Sensor plane at the time of the sun pulse may be a large angle to the theoretical DSL axis. In that case, there needs to be either an elevation-dependent correction to the sun pulse time or an elevation-dependent Spin Phase rotation.

3. Earth-Centered Coordinate Systems

3.1 GEI (Geocentric Equatorial Inertial)

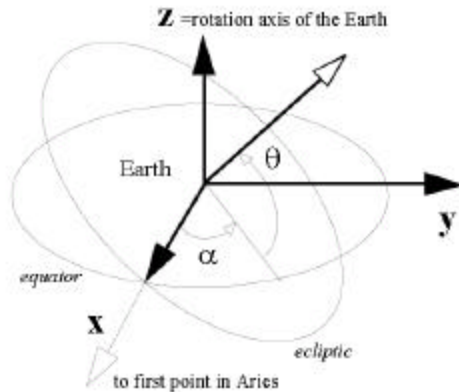

The Z-axis is parallel to the rotation axis of the Earth.

The X-axis is defined by the intersection of the equator plane and the ecliptic plane, and is pointing towards the first point of Aries (Sun position at the vernal equinox).




one can define the *right ascension* α and the *declination* θ as:

right ascension $\alpha = \tan^{-1}(V_y/V_x)$ with α in $[0^\circ, 180^\circ]$ for $V_y > 0$
 α in $[180^\circ, 360^\circ]$ for $V_y < 0$

declination $\theta = \sin^{-1}(V_z/V)$ with θ in $[-90^\circ, 90^\circ]$

3.2 GEO (Geographic)

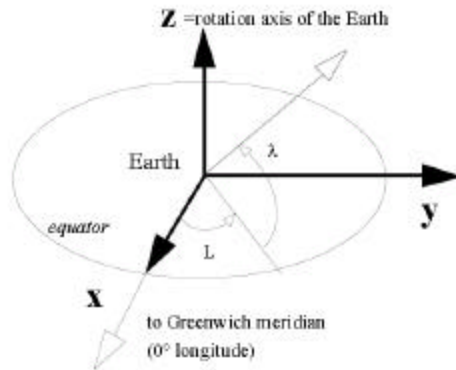


The Z-axis is parallel to the rotation axis of the Earth.
The X and Y axis are included in the equator plane.
The X axis is pointing from the centre of the Earth to the Greenwich meridian (0° longitude).

The GEO system is fixed with the rotating Earth. Longitude L and latitude λ are defined in this system in the same way as right ascension and declination in GEI system.




3.3 GSE (Geocentric Solar Ecliptic)

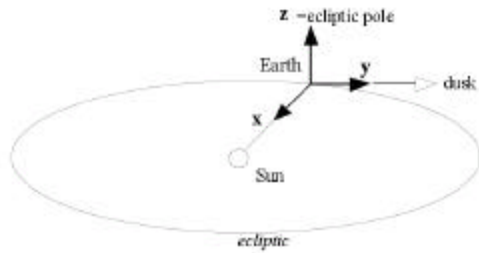

The X-axis is pointing from the Earth towards the Sun.
 The X-axis and the Y-axis are include in the ecliptic plane.
 The Y-axis is pointing toward the dusk, opposing to the planetary motion.

The Z-axis is parallel to the ecliptic pole. The GSE system has a yearly rotation with respect to the inertial system.

3.4 GSM (Geocentric Solar Magnetospheric).

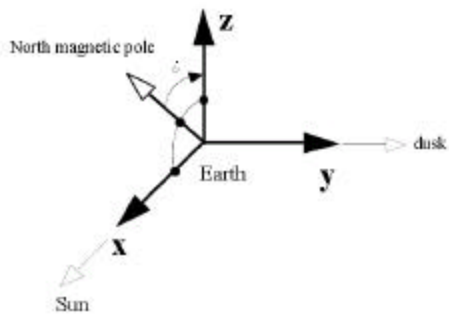


The X-axis is pointing from the Earth towards the Sun.
 The X-Z plane contains the dipole axis.
 The Y-axis is perpendicular to the Earth's magnetic dipole, towards the dusk and include in the magnetic equator plane.

The positive Z-axis is chosen to be in the same sense as the northern magnetic pole; the dipole tilt angle i is positive when the north magnetic pole is tilted towards the Sun. In addition to a yearly period due to the motion of the Earth about the Sun, the GSM system rocks about the Solar direction with a 24 h period.



3.5 Solar Magnetic (SM)

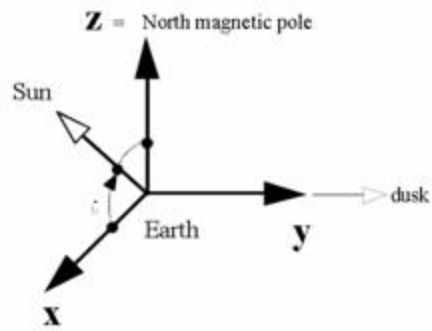

The Z-axis is parallel to the North magnetic dipole.
The X-Z plane contains the direction of the Sun.
The Y-axis is perpendicular to the Earth-Sun line toward dusk.

The SM system rotates with both a yearly and a daily period with respect to the inertial system.



4. Appendix: Ground measured rotation from SPG to SSL (G2S)

Probe A.

MAG Booms Deployed		G2S		
Post I&T Spin-Balance and Alignment Measurement		a	b	g=- a+f
9/16/2006	Euler Angles (deg)=	45.00	0.25	90.17
	Sin	0.71	0.00	1.00
Xgeom to X Sun Sensor f= 135.17	Cos	0.71	1.00	0.00

G2S			
PROBE GEOMETRIC TO SPIN AXIS			
Orthogonal Rotation Matrix	-0.709	0.705	0.000
<i>Columns</i> are Old Unit Vectors in New System	-0.705	-0.709	0.004
... Or Computed from Euler Angles	0.003	0.003	1.000

Probe B.

MAG Booms Deployed		G2S		
Post I&T Spin-Balance and Alignment Mea		a	b	g=- a+f
9/16/2006	Euler Angles (deg)=	45.00	0.25	89.88
	Sin	0.71	0.00	1.00
Xgeom to X Sun Sensor f= 134.88	Cos	0.71	1.00	0.00

G2S			
PROBE GEOMETRIC TO SPIN AXIS			
Orthogonal Rotation Matrix	-0.706	0.709	0.000
<i>Columns</i> are Old Unit Vectors in New System	-0.709	-0.706	0.004
... Or Computed from Euler Angles	0.003	0.003	1.000

Probe C.

MAG Booms Deployed		G2S		
Post I&T Spin-Balance and Alignment Mea		a	b	g=- a+f
9/16/2006	Euler Angles (deg)=	45.00	0.25	89.98
	Sin	0.71	0.00	1.00
Xgeom to X Sun Sensor f= 134.98	Cos	0.71	1.00	0.00

G2S			
PROBE GEOMETRIC TO SPIN AXIS			
Orthogonal Rotation Matrix	-0.707	0.707	0.000
<i>Columns</i> are Old Unit Vectors in New System	-0.707	-0.707	0.004
... Or Computed from Euler Angles	0.003	0.003	1.000

Probe D.

MAG Booms Deployed		G2S		
Post I&T Spin-Balance and Alignment Mea		a	b	g=- a+f
9/16/2006	Euler Angles (deg)=	45.00	0.25	-45.00
	Sin	0.71	0.00	-0.71
Xgeom to X Sun Sensor f= 135.07	Cos	0.71	1.00	0.71

G2S			
PROBE GEOMETRIC TO SPIN AXIS			
Orthogonal Rotation Matrix	1.000	0.000	-0.003
<i>Columns</i> are Old Unit Vectors in New System	0.000	1.000	-0.003
... Or Computed from Euler Angles	0.003	0.003	1.000



Probe E.

MAG Booms Deployed		G2S		
Post I&T Spin-Balance and Alignment Mea		a	b	g=- a+f
9/16/2006	Euler Angles (deg)=	45.00	0.25	89.92
	Sin	0.71	0.00	1.00
Xgeom to X Sun Sensor f= 134.92	Cos	0.71	1.00	0.00

		G2S		
		PROBE GEOMETRIC TO SPIN AXIS		
Orthogonal Rotation Matrix		-0.706	0.708	0.000
Columns are Old Unit Vectors in New System		-0.708	-0.706	0.004
... Or Computed from Euler Angles		0.003	0.003	1.000